


COMPO FUEL OIL

COMPOSITE HOSE

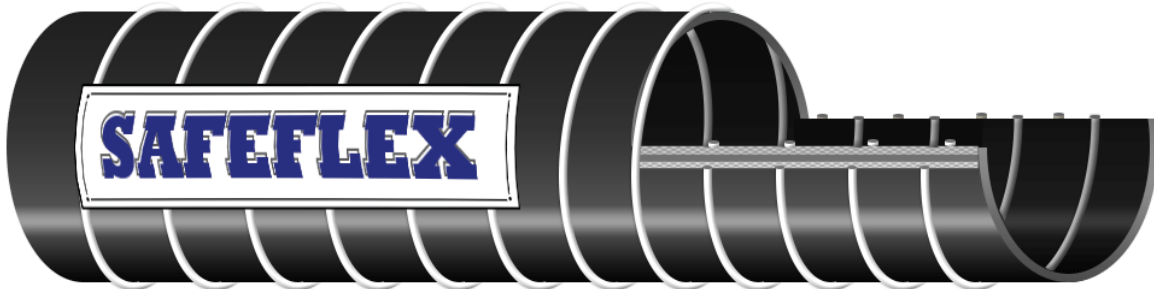

SPECIFICATION	Oil and petrol hose
APPLICATION	Suitable for 100% aromatics and MTBE transfer
LINING	Polypropylene
INNER WIRE	Galvanized steel
OUTER WIRE	Galvanized steel
TEMPERATURE	-20°C to +80°C
SAFETY FACTOR	4 : 1
COLOUR	Black
LENGTH	30M Max.
BRAND	SafeFlex

Hose conforms to BS EN13765:2010

INSIDE DIAMETER	WORKING PRESSURE		BEND RADIUS		NOM WEIGHT	
(INCH)	(BAR)	(PSI)	(MM)	(INCH)	(KG/M)	(LB/T)
1	10	150	102	4.0	0.8	0.5
1 - 1/4	10	150	127	5.0	1.1	0.6
1 - 1/2	10	150	140	5.5	1.2	0.8
2	10	150	178	7.0	1.9	1.3
2 - 1/2	10	150	203	8.0	2.5	1.7
3	10	150	279	11.0	3.0	2.0
4	10	150	394	15.5	4.8	3.2