


EPDM SATURATED STEAM HOSE

17 BAR (250PSI)

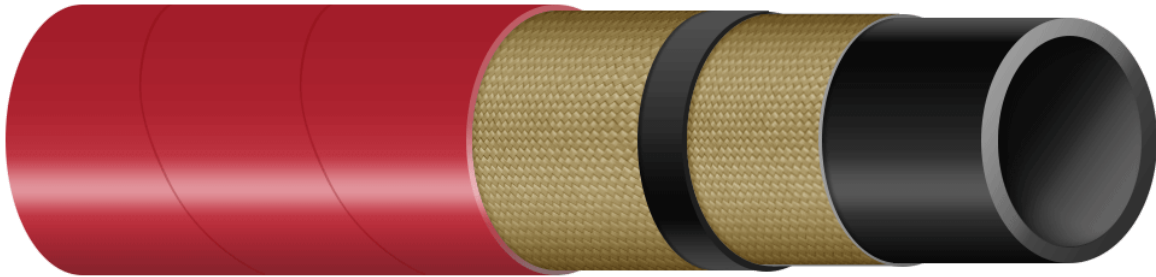

APPLICATION	Mandrel built high pressure wire reinforced steam hose designed for service with superheated steam in heat control, fire prevention etc.
COVER	Red EPDM Heat, Abrasion and Ozone Resistant
REINFORCEMENT	High Tensile Steel Wire Cord
TUBE	Black EPDM Rubber, Heat Resistant
TEMPERATURE	-40°C to +200°C

INSIDE DIAMETER (INCH)	OUTSIDE DIAMETER (MM)	WORKING PRESSURE (BAR)	BURST PRESSURE (PSI)	STANDARD LENGTH (M)	WEIGHT (KG/M)
1/2	25	17	170	61	0.55
3/4	33	17	170	61	0.83
1	40	17	170	61	1.02
1 - 1/2	54	17	170	61	1.70
2	69	17	170	61	2.60