


HD MARINE COMPO CARGO OIL COMPOSITE HOSE

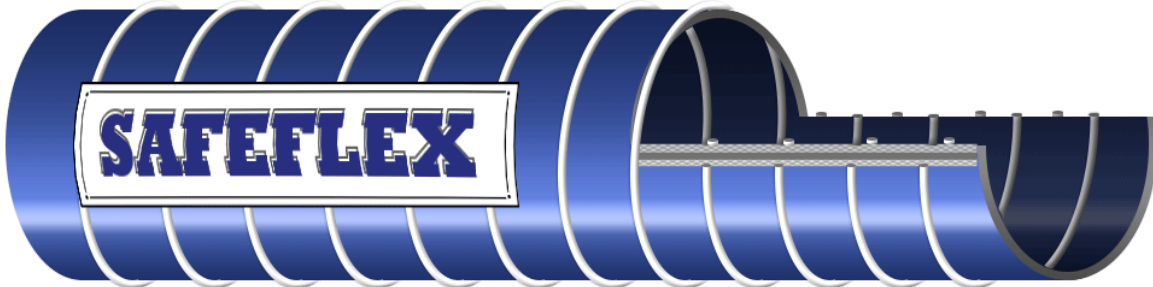

SPECIFICATION	Oil, petrol, diesel and 100% aromatics
APPLICATION	Conveying hydrocarbon, ship to ship and ship to shore
LINING	Polypropylene
INNER WIRE	Galvanized steel
OUTER WIRE	Galvanized steel
TEMPERATURE	-30°C to +90°C
SAFETY FACTOR	4 : 1
COLOUR	Blue
LENGTH	30M Max
BRAND	SafeFlex

Hose conforms to BS EN13765:2010

INSIDE DIAMETER	WORKING PRESSURE		BEND RADIUS		NOM WEIGHT	
	(INCH)	(BAR)	(PSI)	(MM)	(INCH)	(KG/M)
3	16	232	280	11	3.66	2.46
4	16	232	400	16	5.28	3.55
6	16	232	575	23	11.90	8.00
8	16	232	800	32	15.65	10.52
10	16	232	1000	40	22.53	15.14
12	16	232	1200	48	31.78	21.40