


## HD MARINE COMPO CHEM COMPOSITE HOSE

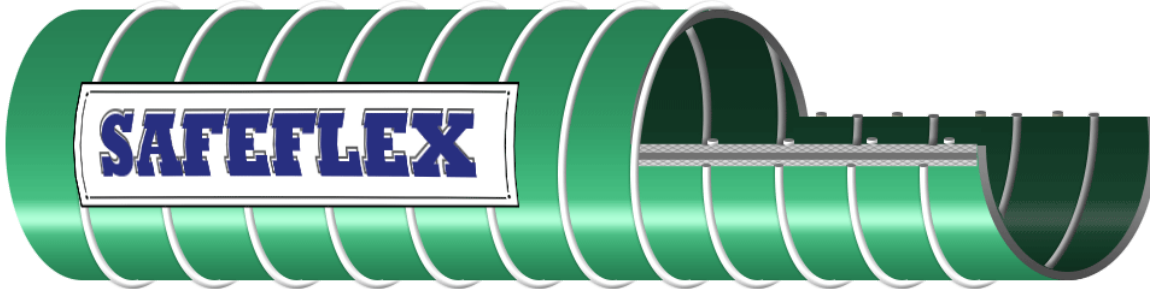

<b>SPECIFICATION</b>	Those chemical which do not affect the polypropylene lining and SS wire
<b>APPLICATION</b>	Transfer wide range of chemical, ship to ship, ship to shore and dockside
<b>LINING</b>	Polypropylene
<b>INNER WIRE</b>	Stainless steel
<b>OUTER WIRE</b>	Stainless steel
<b>TEMPERATURE</b>	-30°C to +90°C
<b>SAFETY FACTOR</b>	4 : 1
<b>COLOUR</b>	Green
<b>LENGTH</b>	30M Max
<b>BRAND</b>	SafeFlex

### Hose conforms to BS EN13765:2010

INSIDE DIAMETER	WORKING PRESSURE		BEND RADIUS		NOM WEIGHT	
	(INCH)	(BAR)	(PSI)	(MM)	(INCH)	(KG/M)
3	16	232	280	11	3.66	2.46
4	16	232	400	16	5.28	3.55
6	16	232	575	23	11.90	8.00
8	16	232	800	32	15.65	10.52
10	16	232	1000	40	22.53	15.14
12	16	232	1200	48	31.78	21.40