


HD MARINE COMPO PTFE CHEM COMPOSITE HOSE

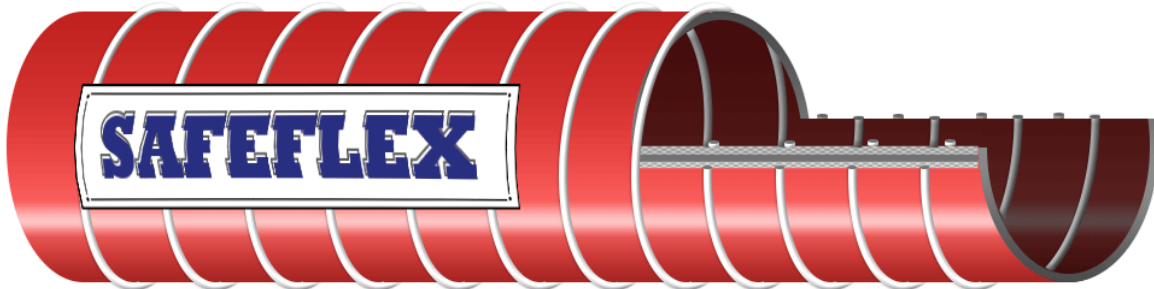

SPECIFICATION	Extra special designed layers to withstand the most extreme chemical
APPLICATION	Transfer aggressive range of chemical, ship to ship, ship to shore and dockside
LINING	PTFE
INNER WIRE	Stainless steel
OUTER WIRE	Galvanized steel
TEMPERATURE	-30°C to +90°C
SAFETY FACTOR	4 : 1
COLOUR	Red
LENGTH	30M Max.
BRAND	SafeFlex

Hose conforms to BS EN13765:2010

INSIDE DIAMETER	WORKING PRESSURE		BEND RADIUS		NOM WEIGHT	
	(INCH)	(BAR)	(PSI)	(MM)	(INCH)	(KG/M)
3	16	232	280	11	3.66	2.46
4	16	232	400	16	5.28	3.55
6	16	232	575	23	11.90	8.00
8	16	232	800	32	15.65	10.52
10	16	232	1000	40	22.53	15.14
12	16	232	1200	48	31.78	21.40