


# NG20S NITROGEN

20 Bar (300 PSI)

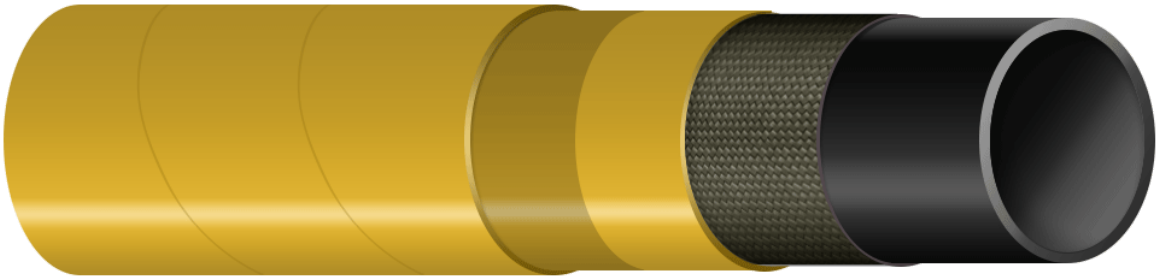

- TYPICAL APPLICATION** Nitrogen
- TUBE** Black EPDM
- REINFORCEMENT** High Tensile Textile Cords
- COVER** Yellow EPDM, Abrasion and Ozone Resistant
- TEMPERATURE** -40°C to 95°C maximum recommended working temperature
- SAFETY FACTOR** 3 : 1
- BRANDING** Inert Gas Hose

PART NO	INSIDE DIAMETER		OUTSIDE DIAMETER (MM)	WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RAD (MM)	WEIGHT (KG/M)
	(MM)	(INCH)		(Bar)	(PSI)	(Bar)	(PSI)		
NG20S-006	10	3/8	17	20	300	60	900	60	0.23
NG20S-008	13	1/2	21	20	300	60	900	78	0.39
NG20S-012	19	3/4	28	20	300	60	900	114	0.64
NG20S-016	25	1	35	20	300	60	900	150	0.80
NG20S-024	38	1.1/2	52	20	300	60	900	228	1.11
NG20S-032	51	2	70	20	300	60	900	306	2.09