


# ASPHALT MASTER 600 METAL HOSE

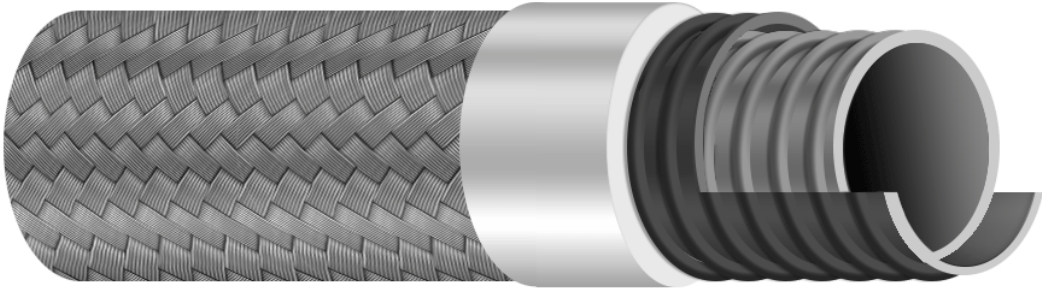

- APPLICATION** Suction and delivery of bitumen and other products  
Ship to shore or tank truck loading
- ADVANTAGE** Extremely light and flexible  
Easy handling  
Electrical conductivity ensured  
Excellent resistance to weather, corrosion and ageing  
Argon welded on end fittings ensure safety
- CONSTRUCTION** Inner layer: Smooth bore interlocking tube  
Intermediate layer: Corrugated tube  
Outer layer: Wire braiding
- SPECIFICATION** Max. working temperature: 600 degree celcius  
Max. working pressure: 10 Bar  
Safety factor: 4:1  
Standards: Conforms to BS 6501 Part 1: 1991

SIZE	ID	BEND RADIUS	WEIGHT
	(MM)	(MM)	(KG/M)
2"	44	318	2.70
2-½"	59	508	3.75
3"	70	610	5.00
4"	90	750	7.20
5"	116	900	11.25
6"	137	1050	13.50
8"	187	1180	17.00

Tolerance - Dimension : +/- 2mm  
- Weight : +/- 0.2kg