


# XLPE CHEMICAL SUCTION & DISCHARGE HOSE

16 BAR (230 PSI)

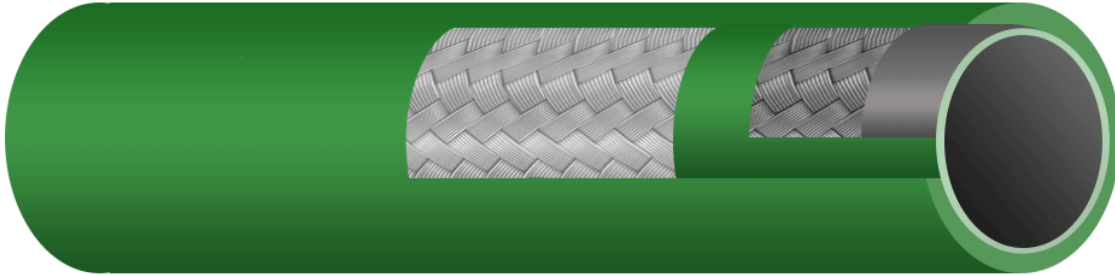

<b>COVER</b>	Green weather resistance EPDM blend which also resists general chemical & hydrocarbon exposure
<b>REINFORCEMENT</b>	High tensile textile cord with flexible steel helix wire
<b>TUBE</b>	XLPE (Cross Linked Polyethylene), synthetic textile cord with 4 highly flexible steel helix wires
<b>APPLICATION</b>	For use with highly corrosive / aggressive chemicals. It will handle almost 98% of all known industrial chemicals. Temperature range -10°C to +65°C
<b>BRANDING</b>	SAFEFLEX CHEMICAL SUCTION & DISCHARGE 16 BAR

PART NUMBER	INSIDE DIAMETER	O.D.	WORKING PRESSURE	BURST PRESSURE	STD LENGTH	WEIGHT
	(INCH)	(MM)	(BAR)	(BAR)	(M)	(KG/M)
XLPE 075	¾"	31	16	48	60	0.69
XLPE 100	1"	37	16	48	60	0.85
XLPE 125	1¼"	44	16	48	60	1.01
XLPE 150	1½"	51	16	48	60	1.16
XLPE 200	2"	67	16	48	60	2.32
XLPE 300	3"	92	16	48	60	2.78
XLPE 400	4"	122	16	48	60	3.78
XLPE 600	6"	174	16	48	60	7.80